




Регулирующий клапан ECOTROL серии 6N

Технические характеристики

Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астана +7(7172)727-132	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Астрахань (8512)99-46-04	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Барнаул (3852)73-04-60	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Белгород (4722)40-23-64	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Брянск (4832)59-03-52	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Владивосток (423)249-28-31	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Волгоград (844)278-03-48	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Вологда (8172)26-41-59	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)22948 -12
Воронеж (473)204-51-73	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Екатеринбург (343)384-55-89	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Иваново (4932)77-34-06	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Ижевск (3412)26-03-58	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54	

Единый адрес для всех регионов: acu@nt-rt.ru || www.arca.nt-rt.ru

Technical Data Sheet ECOTROL® Control Valve



TD_6N

General Data

Series	6N
Nominal Size DN /NPS	150-500 / 6" – 20"
Nominal Pressure PN / ANSI	10-40 / Class 150-300
Characteristics	equal percentage or linear
Rangeability	40:1
Plug guide	stem guided, option: double guiding (retrofit able)
Seat leakage	metal sealing: IEC 50534-4 leakage class IV (0,01% kVs- value); option: leakage class V soft sealing: IEC 50534-4 leakage class VI
Bellow sealing (option)	seamless, double walled, made of 1.4571, option: Hastelloy and other materials
Heating jacket (option)	Connections DN 15 PN 40 (1/2" ANSI 300) flanges
Low temperature design (option)	Down to -196°C


Materials

Body Materials		EN	Temperature range	ASTM	Temperature range	
		1.0619 GP240GH*	-10 to 400°C	A 216 WCB*	-29°C to 400°C	
		1.4408 G-X 5 CrNiMo 19 11 2	-196 to 400°C	A 351 CF8M*	-196°C to 400°C	
		1.4581 GX5CrNiMoNb 19-11-2*	-10 to 450°C	-	-	
		1.6220 G20Mn5	-40 to 400°C	A 352 LCB	-50°C to 400°C	
		1.6982 GX3CrNi13-4	-120 to 400°C	-	-	
		1.7357 G17CrMo5-5	-10 to 530°C	A 217 WC6	-29°C to 530°C	
Bonnet Materials		Same material as body, stuffing box sleeve made of 1.4571 (AISI 316Ti)				
Trim material						
Material No.	Parabolic Plug	Perforated plug L1	Seat	Seat sealing	Max. fluid temperature	
1	1.4122*	1.4122 nitrided	1.4021*	metallic	same as stem sealing	
2	1.4571*	1.4571 nitrided	1.4571*	metallic	same as stem sealing	
3	1.4112 hardened	1.4112 hardened	1.4112 hardened	metallic	same as stem sealing	
4	1.4122*	1.4122 nitrided	1.4021*	PTFE/FKM	-50 ~ 160°C	
5	1.4571*	1.4571 nitrided	1.4571*	PTFE/FKM	-50 ~ 160°C	
6	1.4112 hardened	1.4112 hardened	1.4112 hardened	PTFE/FKM	-50 ~ 160°C	
7	1.4122*	1.4122 nitrided	1.4021*	PTFE/EPDM	-50 ~ 140°C	
8	1.4571*	1.4571 nitriert	1.4571*	PTFE/EPDM	-50 ~ 140°C	
9	1.4112 hardened	1.4112 hardened	1.4112 hardened	PTFE/EPDM	-50 ~ 140°C	
10	1.4122*	1.4122 nitrided	1.4021*	PTFE	-196 ~ 180°C	
11	1.4571*	1.4571 nitrided	1.4571*	PTFE	-196 ~ 180°C	
12	1.4112 hardened	1.4112 hardened	1.4112 hardened	PTFE	-196 ~ 180°C	

* Standard

Technical Data Sheet


ECOTROL® Control Valve



TD_6N



Temperature range for stem sealings

Sealing type	Packing Ring (Item A)	Micro sealing (Item B)	O-Ring (Item C)	Wiper ring (Item D)	Temp. range	Top flange design	Remarks
Maintenance free double sealing	PTFE V-Ring	EPDM (FKM)	EPDM	NBR	-25 ~ 180 (200)°C	Standard	preloaded c/w stainless steel spring
adjustable	reinforced Graphite/ Inconel	-	-	NBR (FKM)	-29 ~ 400°C	Standard/ Cooling fins	Standard operation
adjustable	Pure Graphite	-	-	VITON	-29 ~ 530°C	Standard/ Cooling fins	high temperature
adjustable	Braided Graphite/ PTFE	-	-	NBR	-196 ~ 200°C	Extended bonnet	low temperature
Bellow sealing c/w double safety sealing	PTFE V-Ring/ bellow (1.4571 or Hastelloy C)	EPDM (FKM)	EPDM	NBR (FKM)	-100 ~ 200°C	Bellow sealing	preloaded c/w stainless steel spring

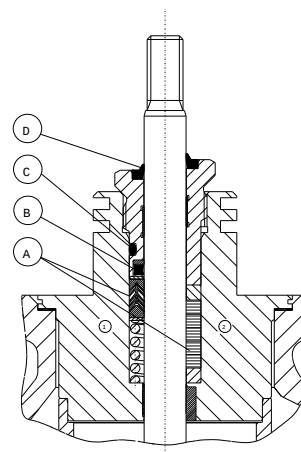

Weights and dimensions

Dimensions (mm) of valves c/w flanges acc. to DIN EN 1092-1 or ANSI Class 150/300 RF/RTJ								
Valve Series 6N	DN	150	200	250	300	350	400	500
	ANSI NPS	6"	8"	10"	12"	14"	16"	20"
	VBL PN10-PN40	480	600	730	850	980	1100	1250
	VBL Class 150 RF	450,8	542,9	673,1	736,6	889	1016	1250
	VBL Class 150 RTJ	463,5	555,7	-	-	-	-	-
	VBL Class 300 RF	472,9	568,3	708	774,7	927,1	1057,3	1250
	VBL Class 300 RTJ	488,9	584,1	-	-	-	-	-
	VH	DEK1	260	295	360	395	465	600
		DEK2	355	410	510	545	615	1)
		DEK3	355	410	510	545	615	1)
		DEK4	575	605	850	850	880	1)
		DEK5	on request					
		DEK7	260	295	360	395	465	600
		DEK8	355	410	510	545	615	670
	VU	190	240	305	335	395	445	540
Actuator ²⁾ Type 812/811/MA	ØA	MFIII	400					
		UV			530			
		MA.60			596			
	AH	MFIII	625					
		UV	1006		1135			
		MA.60	840		1010			
	AHV	MFIII	888					
		UV	1323		1452			
		B	200		340			
	weight* ca. kg	MFIII	247	332				
		UV	250	350	535	830	1160	1460
		MA.60	330	390	600	1000	1300	1770

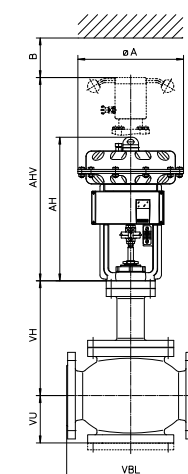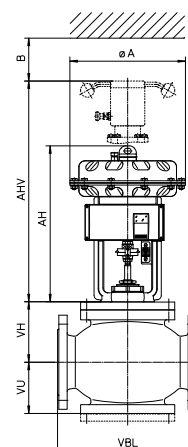


1) On request

2) Actuator type for DN500/ 20" on request

*) valve c/w actuator w/o hand wheel

Technical Data Sheet ECOTROL[®] Control Valve




TD_6N

Standard kVs/ Cvs and seat diameters of series 6N (not balanced)

DN/ NPS	Seat-Ø (mm)	Characteristics	kVs [m³/h]		Cvs [gal/min]	
			Parabolic Plug	Perforated Plug	Parabolic Plug	Perforated Plug
150 6"	90	= %	150	125	157	146
		linear		170		199
	113	= %	260	150	304	175
		linear		260		304
	143	= %	380	210	445	246
		linear		380		445
200 8"	113	= %	260	150	304	175
		linear		260		304
	143	= %	380	210	445	246
		linear		380		445
	172	= %	650	260	761	304
		linear		450		523
250 10"	143	= %	380	210	445	246
		linear		380		445
	172	= %	650	260	761	304
		linear		450		526
	220	= %	900	520	1053	608
		linear		900		1053
300 12"	172	= %	650	260	761	304
		linear		450		526
	220	= %	900	520	1053	608
		linear		900		1053
	282	= %	1300	720	1521	842
		linear		1300		1521
350 14"	220	= %	900	520	1053	608
		linear		900		1053
	282	= %	1300	720	1521	842
		linear		1300		1521
	313	= %	1800	850	2106	995
		linear		1800		2106
400 16"	282	= %	1300	720	1521	842
		linear		1300		1521
	313	= %	1800	850	2106	995
		linear		1800		2106
	400	= %	2500	1250	2925	1462
		linear		2500		2925
500 20"	400	= %	2500	1250	2925	1462
		linear		2500		2925
	500	= %	4000	-	2925	-
		linear		4000		4680

Technical Data Sheet

ECOTROL® Control Valve



TD_6N

Max. shut off differential pressures (valve closed)
(PTFE packing (V-Ring), leakage class IV, w/o balancing, ¹⁾ flow-to-open)

Actuator series 812 Type MFIII - 60 (multi-spring actuator)		Air to open / Spring to close No. of springs				Air to close / spring to open No. of springs				
		3	6	9	12	3	3	3	6	6
DN/ NPS	Seat-Ø (mm)	bar				p instrument air, min [bar]				
		3,0	4,5	6,0	4,5	6,0				
150 6"	90	4,9	12,7	17,4	22,2	14,0	31,0	47,9	14,0	31,0
	113	2,7	7,7	10,7	13,7	8,5	19,3	30,1	8,5	19,3
	143	1,4	4,5	6,4	8,3	5,0	11,7	18,5	5,0	11,7
200 8"	113	2,7	7,7	10,7	13,7	8,5	19,3	30,1	8,5	19,3
	143	1,4	7,7	6,4	8,3	5,0	11,7	18,5	5,0	11,7
	172	0,8	2,9	4,2	5,5	3,3	7,9	12,6	3,3	7,9


Actuator series 811 Type UV-60 (single-spring actuator)		Air to open / Spring to close spring				Air to close / spring to open spring				
		standard		reinforced		standard			reinforced	
DN/ NPS	Seat-Ø (mm)	Min.	Max.	Min.	Max.	p instrument air, min [bar]				
		bar	bar	bar	bar	3,0	4,5	6,0	4,5	6,0
150 6“	90		19,2		35,8	48,6	50,0	50,0	50,0	50,0
	113		11,8		22,4	30,5	50,0	50,0	36,5	50,0
	143		7,1		13,7	18,7	32,2	45,8	22,5	36,0
200 8“	113		11,8		22,4	30,5	50,0	50,0	36,5	50,0
	143		7,1		13,7	18,7	32,2	45,8	22,5	36,0
	172		4.7		9.3	12.7	22.0	31.4	15.4	24.7

Actuator series 811 Type UV-100 (single-spring actuator)		Air to open / Spring to close spring				Air to close / spring to open spring				
		standard		reinforced		standard			reinforced	
DN/ NPS	Seat-Ø (mm)	Min.	Max.	Min.	Max.	p instrument air, min [bar]				
		bar	bar	bar	bar	3,0	4,5	6,0	4,5	6,0
250 10"	143		3,3		6,8	17,3	30,7	44,2	22,3	35,7
	172		2,1		4,5	11,8	21,1	30,4	15,2	24,5
	220		1,1		2,6	7,0	12,7	18,4	9,1	14,8
300 12"	172		2,1		4,5	11,8	21,1	30,4	15,2	24,5
	220		1,1		2,6	7,0	12,7	18,4	9,1	14,8
	282		0,5		1,4	4,1	7,6	10,0	5,4	8,8
350 14"	220		1,1		2,6	7,0	12,7	18,4	9,1	14,8
	282		0,5		1,4	4,1	7,6	10,0	5,4	8,8
	313		0,3		1,1	3,3	6,1	8,9	4,3	7,1

Actuator series 811 Type UV-120 (single-spring actuator)		Air to open / Spring to close spring				Air to close / spring to open spring				
		standard		reinforced		standard			reinforced	
DN/ NPS	Seat-Ø (mm)	Min.	Max.	Min.	Max.	p instrument air, min [bar]				
		bar	bar	bar	bar	3,0	4,5	6,0	4,5	6,0
400 16"	282	-	-	-	0,5	4,1	7,6	11,0	5,4	8,8
	313	-	-	-	0,3	3,3	6,1	8,9	4,3	7,1
	400	-	-	-	-	1.9	3.6	5.3	2.5	4.2

¹⁾ For higher differential pressures, balanced trim is required. Please contact ARCA!

Technical Data Sheet ECOTROL® Control Valve




TD_6N

Max. shut off differential pressures (valve closed)
(PTFE packing (V-Ring), leakage class IV, w/o balancing, ¹⁾ flow-to-open)

Actuator series MA60.D (multi-spring actuator)		Air to open / Spring to close No. of springs				Air to close / spring to open No. of springs				
		2	4	6	8	2	2	2	4	4
DN/ NPS	Seat-Ø (mm)	bar				p instrument air, min [bar]				
						3,0	4,5	6,0	4,5	6,0
150 6"	90	12,7	28,4	44,2	50,0	50,0	50,0	50,0	-	-
	113	7,7	17,7	27,7	37,6	47,6	50,0	50,0	-	-
	143	4,5	10,7	17,0	23,2	29,4	41,9	50,0	-	-
200 8"	113	7,7	17,7	27,7	37,6	47,6	50,0	50,0	-	-
	143	4,5	10,7	17,0	23,2	29,4	41,9	50,0	-	-
	172	2,9	7,2	11,5	15,8	20,2	28,8	37,4	-	-
250 10"	143	4,5	10,7	17,0	23,2	29,4	41,9	50,0	-	-
	172	2,9	7,2	11,5	15,8	20,2	28,8	37,4	-	-
	220	1,4	3,9	6,4	8,7	11,8	18,6	25,4	-	-
300 12"	172	2,9	7,2	11,5	15,8	20,2	28,8	37,4	-	-
	220	1,4	3,9	6,4	8,7	11,8	18,6	25,4	-	-
	282	0,7	2,2	3,7	5,2	7,0	11,2	15,3	-	-
350 14"	220	1,4	3,9	6,4	8,7	11,8	18,6	25,4	-	-
	282	0,7	2,2	3,7	5,2	7,0	11,2	15,3	-	-
	313	0,5	1,7	2,9	4,1	5,6	9,0	12,4	-	-
400 16"	282	0,7	2,2	3,7	5,2	7,0	11,2	15,3	-	-
	313	0,5	1,7	2,9	4,1	5,6	9,0	12,4	-	-
	400	-	0,4	0,9	1,3	3,3	5,4	7,5	-	-

Technical Data Sheet ECOTROL® Control Valve



TD_6N

ECOTROL® 6N type code

0. Operating Conditions		7. Body materials (cont.)		16. Seat/ plug seal ¹⁾	
Fluid:		6	A216WCB	0	Leakage class IV (metal to metal)
Temp.:	°C	7	A351CF8M	1	Leakage class V (metal, super finished)
Press. P ₁ :	bar abs	8	A217WC6	2	Soft sealed (PTFE/EPDM)
Press. P ₂ :	bar abs	9	other (in acc. with order)	3	Soft sealed (PTFE/FKM)
1. Series		8. Guiding ¹⁾		4	
6N		0	Stem guided (standard)	9	other (in acc. with order)
2. Bonnet		1	Bottom guided	17. Cage Retainer ¹⁾	
1	Standard	9	other (in acc. with order)	0	Standard
2	Double stuffing box	9. kVs		1	LN (Low Noise), not controlled
3	Cooling fins	xxx	in acc. with order	2	LN controlled
4	Bellows	10. Characteristics		9	other (in acc. with order)
5	Extension (insulating column)	l	Linear	18. Low noise cage ¹⁾	
7	Standard balanced	g	=%	1	LK1
8	Cooling fins balanced	m	modified	2	LK2
9	Special design in acc. with order	s	On/ Off	3	LK3
3. Plug design		11. Plug materials ¹⁾		4	LK4
P1-P3-P5	Parabolic plug (1-3-5 step)	1	1.4571	5	SLK1
L1-L2-L3	Perforated plug (1-2-3 step)	3	1.4112	6	SLK2
S	On/ Off plug	4	1.4122	9	other (in acc. with order)
4. Nominal diameter (DN) – DIN/ ANSI		9	other (in acc. with order)	19. Stem sealing ¹⁾	
150	DN 150 / ANSI 6"	12. Plug wear/ tear protection ¹⁾		1	PTFE/V-Ring/EPDM quad ring
200	DN 200 / ANSI 8"	0	Standard (w/o)	2	PTFE/V-Ring/VITON quad ring
250	DN 250 / ANSI 10"	1	nitrided	3	Latty 6118/ETF Inconel
300	DN 300 / ANSI 12"	2	hardened	4	Graphite 0901
350	DN 350 / ANSI 14"	3	Plug face stellited	5	Graphite/PTFE 6226/6232
400	DN 400 / ANSI 16"	4	Completely stellited	9	other (in acc. with order)
500	DN 500 / ANSI 20"	5	Colsterised	20. special design	
5. Nominal pressure (PN)		9	other (in acc. with order)	0	Standard
10	PN 10	13. Balancing ¹⁾		1	AD2000
16	PN 16	1	Piston rings	2	NACE
40	PN 40	2	EPDM- quad ring	3	Oxygen design
150	Class 150 acc. to ANSI B16.10	3	FKM- quad ring	9	other (in acc. with order)
300	Class 300 acc. to ANSI B16.10	5	PTFE spring loaded	21. Material inspection (pressure retaining parts)	
6. Connections		9	other (in acc. with order)	0	w/o
0	Flanges c/w sealing strip RF SF	14. Seat materials		1	EN 10204-2.1
1	Flanges c/w groove	1	1.4571	2	EN 10204-3.1
2	Flanges c/w tongue	3	1.4112	3	EN 10204-3.2
3	Flanges c/w projection/ recess	4	1.4122	9	other (in acc. with order))
4	Butt weld ends	9	other (in acc. with order)	22. Final inspection	
5	Butt weld ends c/w spool pieces	15. Seat wear/ tear protection ¹⁾		0	w/o
7	RTJ	0	standard (w/o)	1	EN 10204-2.1
9	other (in acc. with order)	1	nitrided	2	EN 10204-2.2
7. Body materials ¹⁾		2	hardened	3	EN 10204-3.1
2	1.0619	3	Seat face stellited	4	EN 10204-3.2
3	1.4581	4	Completely stellited	9	other (in acc. with order)
4	1.7357	5	Colsterised		
5	1.6620	9	other (in acc. with order)		

¹⁾ in accordance with customer's specification, or selected by manufacturer in accordance with customer's specification (fluid, pressure, etc.)

Example:

6N - 1 - P1 - 150 - 40 - 0 - 2	Position 1-7 / basic data
Series 6N – c/w standard bonnet – c/w parabolic plug - DN150 – PN40 – flanges acc. to EN1092 B1 – body 1.0619	
0 - 260 - g - 1 - 0 - 0 - 1 - 0 - 0 - 0 - 0 - 1	Position 8-19 / trim
Single stem guiding – kVs 260 – equal percentage – plug made of 1.4571 – w/o wear/tear protection – w/o balancing – seat made of 1.4571 – w/o wear/ tear protection – leakage class IV – cage retainer standard – w/o low noise cage – stem sealing PTFE-V-Ring/EPDM quad ring	
0 - 1 - 1	position 20-22 / Design/ inspections
Standard design – Material inspection acc. to EN 10204 3.1 - Final inspection acc. to EN 10204 3.1	

Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астана +7(7172)727-132	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Астрахань (8512)99-46-04	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Барнаул (3852)73-04-60	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Белгород (4722)40-23-64	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Брянск (4832)59-03-52	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Владивосток (423)249-28-31	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Волгоград (844)278-03-48	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Вологда (8172)26-41-59	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)22948 -12
Воронеж (473)204-51-73	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Екатеринбург (343)384-55-89	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Иваново (4932)77-34-06	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Ижевск (3412)26-03-58	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54	